

COMMERCIAL FLOORING SOLUTIONS

gerflor.com



2011 COLLECTION

Gerflor[®]
theflooringgroup

EDITORIAL

Architecture, Decoration, Sport, Technospecific.

FLOORING SOLUTIONS FOR PROFESSIONAL APPLICATIONS

THE QUALITY OF A FLOOR DEPENDS ON ITS USE.

For more than 70 years, Gerflor has been committed to creating solutions that continue to anticipate and answer the needs of customers around the globe.

Our expertise in research and development as well as our manufacturing capabilities are focused on meeting each of our markets' requirements.

Gerflor is a multi-specialist with proven ability to meet the specialised flooring needs of diverse markets including healthcare, retirement homes, education, retail, industry, social housing, offices, sports...

WE PROVIDE YOU WITH ENVIRONMENTALLY RESPONSIBLE SOLUTIONS.

All Gerflor production sites are ISO 14001 certified. We set ourselves the highest standards when it comes to the environmental quality of our manufacturing materials. Gerflor ranks among the product ranges with the lowest VOC emissions on the market.

Gerflor uses recycled materials across all its product ranges. Our new generation of loose-lay products, reduce the use of adhesives and facilitate recovery and recycling at the end of the product's life. In addition, our products are easy to maintain throughout their lives, requiring less water and chemical products than many alternative surfaces.

OUR GOAL IS TO OFFER MORE AND MORE COMPLETE SOLUTIONS.

Our product offer aims to be functional and complete; it goes far beyond our flooring range and includes SPM wall protection and handrails, as well as complementary solutions for:

- optimising floor fitting (tools, soldering etc.)
- achieving a perfectly finished site (skirting, stair-noses etc.)
- resolving specific technical problems (shower systems, accessibility in establishments open to the public etc.)

This catalogue, is a showcase of all our competencies across all market segments. We hope it will be a helpful resource for you and contribute to the success of your projects.

Bertrand CHAMMAS
C.E.O. of the Gerflor Group

GLOSSARY

FORMATS

With foam backing (Comfort)

 Comfort	 Comfort	 Comfort	 Comfort	 Comfort
ROLL	TILE	STEP	REMOVABLE TILE	PLANK


Without foam backing (Compact)

 Compact	 Compact	 Compact	 Compact	 Compact	 Compact
ROLL	TILE	PLANK	REMOVABLE TILE	REMOVABLE PLANK	INTERLOCKING LOOSE-LAY TILE

PERFORMANCES

P ABRASION GROUP	17dB SOUND INSULATION IN DB (EN ISO 717/2)	R10 SLIP RESISTANCE WET (DIN 51130)
----------------------------	---	--

10⁵ ELECTRICAL RESISTANCE IN Ω : 5X10 ⁴ ≤ Rt ≤ 10 ⁶ (EN 1081/DIN 51953)	10⁷ ELECTRICAL RESISTANCE IN Ω : 10 ⁶ ≤ Rt ≤ 10 ⁸ (EN 1081/DIN 51953)
--	--










 100% recyclable 100% RECYCLABLE FLOORING	 RECYCLABLE FLOORING
---	--

TREATMENTS

Protocolsol® POLYURETHANE SURFACE TREATMENT UV CURED	SparClean® POWDER COATED TREATMENT	Sanosol® BACTERIOSTATIC AND FUNGISTATIC TREATMENT
---	---	---

Evercare™ MICRO STRUCTURED CROSS COAT POLYMERISED LASER TECHNOLOGY	 PUR/Protect® POLYURETHANE SURFACE TREATMENT UV CURED	PUR POLYURETHANE SURFACE TREATMENT	PU PU SURFACE TREATMENT
---	---	--	--------------------------------------

CERTIFICATION

	 B _{fl-s1}	 C _{fl-s1}	 STATIC ELECTRICAL PROPENSITY	 ≤10 ⁶ Ω	 ≤10 ⁹ Ω	 DS	 THERMAL CONDUCTIVITY	 WATER RESISTANCE
--	---	---	--	---	---	---	--	--

Scale reduction for Wood designs.

The images of floorcoverings in this catalogue have been reproduced as faithfully as printing technology permits.

• Access for All	254	• Mural Club	183
• Accord	26	• Mural Ultra	183
• Accord EL7 (Mipolam EL)	165	NEW • My Taralay	44
• Adhesives	258	• Nera Classic	102
• Alinea 120 - 200	286	• Organic	66
• Architecton	39	• Oxygen	68
• Artline Wood	111-115	• Pacifica	88
• Artline Mineral	116-120	• Papyrus	72
• Attraction®	142	• Performer 2	318
• Bedkit	295	• Pixel (Nera Contract)	98
NEW • Brazilia	58	• Profiles	228
• Brazilia SD	181	• Renzo	77-78
• Chromatics	80	• Robust EL7 (Mipolam EL)	165
• Classic imperial	35	• Saga ²	152
• Clip System (Stair)	224	• Shower Mural	180
• Contact 120 - 200 - 350	288	• Shower system	178/242
• Corner protection	296	• Skirting	216
NEW • Costa Rica	54	• Stairs	90/222
• Cosmo	32	• Starline (anodised)	320
• Creation Clic System	136	• Starline (decowood)	322
• Creation Wood	111-115	• Starline (PVC)	320
• Creation Mineral	116-120	• Strada	86
• Creation Design	116-120	• Symbioz	18
• Decochoc	290	• Taraflex™ Badminton	198
• Decoclean	291	• Taraflex™ Bateco	196
• Decorative door	308	• Taraflex™ Dry Tex™ System	202
• Decorative frescoes	292	• Taraflex™ Eco-Fit™ System	204
• Decotrend	291	• Taraflex™ Futsal	199
• Decowood	294	• Taraflex™ Multi-Use 6.2	194
• Diversion	74	• Taraflex™ Multi-Use 5.0	196
• Door protection	304	• Taraflex™ Multi-Use 3.0	197
• Educational panels	293	• Taraflex™ Sport M Comfort	193
NEW • Elegance	28	• Taraflex™ Sport M Evolution	193
• Elegance EL5 (Mipolam EL)	167	• Taraflex™ Sport M Performance	193
• Elegance SD	181	• Taraflex™ Surface	196
• Esprit	22	• Taraflex™ Table Tennis	198
• Escort (anodised)	326	• Taraflex™ Tennis	199
• Escort (decowood)	326	• Tarasafe Elements	176
• Escort (PVC)	324	• Tarasafe Geo	171
• Flair	24	• Tarasafe Standard/Plus	177
NEW • Forum	52	• Tarasafe Style	175
• Fusion	50	• Tarasafe Super	177
• Gerflor Corner System	256	• Tarasafe Ultra	173
• Glues	258	• Tarasafe Ultra Comfort	173
• GTI Decor	149	• Tarasafe Uni	174
• GTI Max Decor	151	• Tarastep	93
• GTI Max Uni	151	• Tarastep Premium	92
• GTI Uni	149	• Technic EL5 (Mipolam EL)	167
• Handrails	316	• Tools	264
• Impact	84	• Troplan	33
• Impact 60 - 120 - 200	284	• Uni	62
NEW • Indiana	56	• Univers	38
• Insight Mineral	129	• Urban	70
• Insight Urban	131	• Vibration	65
• Insight Wood	125-127	• Vynaflex	216
• Marking	236	• Wall protection	282
• Metallica	48	• Welding	232
• Mipolam EL	162	• Wood (Nera Contract)	96
• Modern Mix	65	• Wood (Taralay Impression)	76

Homogeneous flooring **NEW**

P.12

► Evercare™

- Mipolam Symbioz
- Mipolam Esprit
- Mipolam Accord
- Mipolam Cosmo

► PUR Protect®

- Mipolam Flair
- Mipolam Elegance

► PUR+

- Mipolam Troplan

► PUR

- Classic Imperial
- Univers
- Architecton

Multilayered flooring **NEW**

P.40

Taralay Premium

- My Taralay
- Metallica
- Fusion
- Forum
- Costa Rica
- Indiana
- Brazilia

Interior Concept 1.0

- Vibration
- Modern Mix

Taralay Impression

- Uni
- Organic
- Oxygen
- Urban
- Papyrus
- Diversion
- Renzo
- Chromatics
- Wood

Taralay Initial

- Impact
- Pacifica
- Strada

Nera Contract

- Nera Contract Wood
- Nera Contract Pixel

Nera

- Nera Classic

Luxury Vinyl tile

P.102

► Creation

- Wood
- Mineral
- Design

► Artline

- Wood
- Mineral
- Design

► Insight

- Wood
- Mineral
- Urban

Fast Track Looselay tile

P.130

► Creation Clic System

- Wood

► Attraction®

- Attraction®

► GTI

- GTI (Uni & Decor)
- GTI Max (Uni & Decor)

► Saga²

Speciality flooring

P.156

► Static control Mipolam EL

- Robust EL7
- Accord EL7
- Technic EL5
- Elegance EL5

► Safety flooring

- Tarasafe Geo
- Tarasafe Ultra & Ultra Comfort
- Tarasafe Style
- Tarasafe Uni
- Tarasafe Elements
- Tarasafe Standard/Plus/Super

► Shower System

- Mural for Shower System
- Elegance SD
- Brazilia SD

► Wall Covering

- Mural Club
- Mural Ultra

Taraflex™ Sports flooring

P.182

► Multi-Sports Floors

- Taraflex™ Sport M Comfort
- Taraflex™ Sport M Performance
- Taraflex™ Sport M Evolution
- Taraflex™ Multi-Use 6.2
- Taraflex™ Multi-Use 5.0
- Taraflex™ Multi-Use 3.0
- Taraflex™ Surface

► Specialised Sports Floors

- Taraflex™ Table Tennis
- Taraflex™ Badminton
- Taraflex™ Futsal
- Taraflex™ Tennis

► A solution for every project

- Dry-Tex™ System
- Eco-Fit™ System

Finishes and technical solutions

P.208

► Finishes

- Skirting solutions
- Our stair solutions
- Profile solutions
- Weld solutions

► Specialized finishes

- Paint and marking for boundary lines

► Technical solutions

- Shower system
- Specific features
- Glues and adhesives
- Tools

Surface protection and handrails

P.270

► Wall protection

- Impact 200 / 120 / 60
- Contact 200 / 120
- Decochoc / Decoclean
- Alinea 200 / 120
- Decotrend / Decowood
- Decorative frescoes
- Educational Panels
- Plac'inox / Bedkit

► Corner protectors

- Capcorn
- Cornea
- Corneaflex
- Profil'inox
- Protecta 2
- Profila

► Door protection

- Half height door protection
- Foot-height door protection
- Half height decorative door plat
- Handplates
- Inlaid signage
- Edges and frames
- Plac'inox

► Handrails

- Performer 2
- Starline with PVC sheath
- Anodised Starline
- Decowood Starline
- Escort with PVC sheath
- Decowood Escort
- Anodised Escort

Specifications - Installation - Maintenance

P.330



ARCHITECTURE

To structure building interior spaces and to offer sustainable solutions for design and performance



DECORATION

To enhance interior decor and easy living



SPORT
To engineer and offer safety, comfort and performance from elite competition to leisure





TECHNOSPECIFIC

To combine technologies and offer solutions for high-tech requirements

GERFLOR

ALL OVER THE WORLD GERFLOR INVENTS FOR YOU

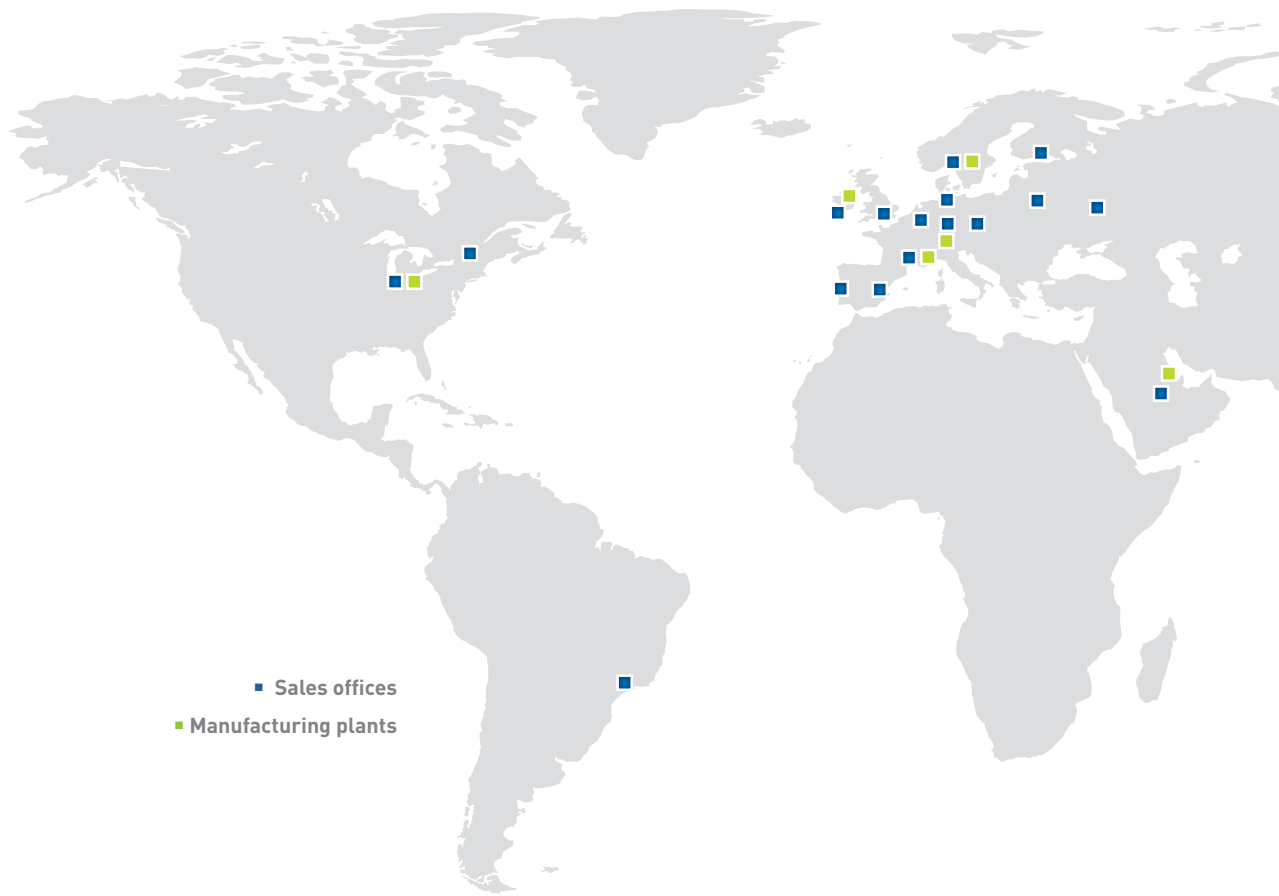

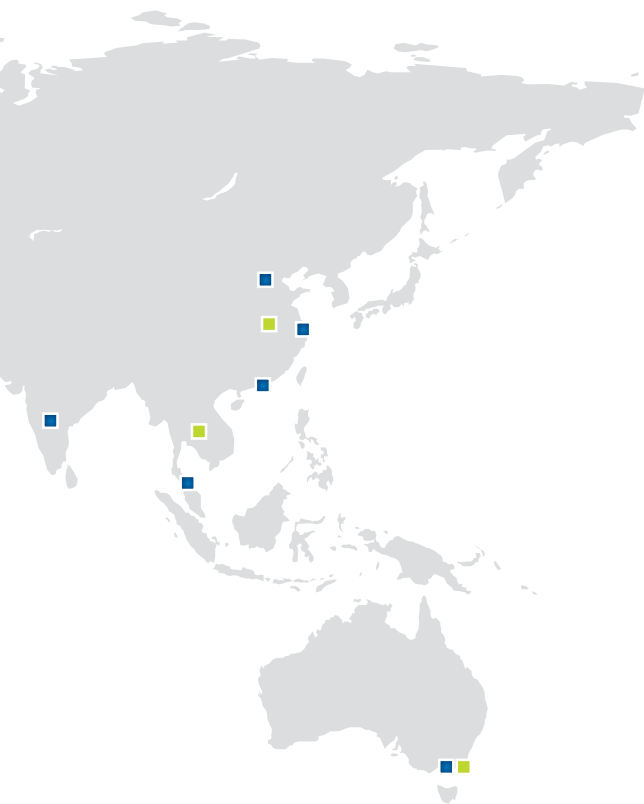

- 1937 **Mipolam** 1st homogeneous flooring
- 1948 **Vinyl** flooring **stretched** on underlay
- 1949 Launch of «**plastic mat**» for homes
- 1962 Vinyl foam-backed flooring: **Taralay, Taraflex® Sport M**
- 1969 Vinyl **cork-backed** acoustic tiles
- 1980 **Batiflex** for aircraft
- 1985 **1st self-adhesive** Vinyl tiles for the home
- 1986 **Batyline** awarded M1 fire classification
- 1988 **ProtecSol®** surface treatment eliminating the need for waxing/polishing
- 1988 1st homogeneous nondirectional flooring: **Mipolam Esprit 500**
- 1989 **Saga**: 1st foam-based loose-lay tile
- 1991 **Portable Badminton floor**: movable product
- 1992 **1st chlorine-free** homogeneous flooring
- 1994 Patterned Vinyl/repeating motif
- 1995 **Tennis ATP** sports flooring
- 1996 Sports flooring in wood-grained Vinyl
- 1997 **Taraflex® Sport Sécurité** double-density Vinyl foam
- 1998 1st slip resistant Vinyl tile
- 2000 **Traveller** MF Vinyl flooring meeting safety requirements in rail transport
- 2001 **GTI AS Decor** decorated interlocking tiles
- 2002 **SparClean®**: a revolutionary surface treatment for Tarasafe non-slip floors
- 2004 **VHD foam**: New Very High Density foam backing for improved dynamic loads resistance (trolley, hospitals beds,...) and better indentation resistance.
- 2005 **Attraction®**: The fast track flooring solution.
- 2006 **Taralay Impression, Chromatics**: the 1st floor with custom made designs and colours.
- 2007 **Taralay Premium**: 8 exclusive designs.
- 2008 **SPM International**: leading manufacturer of wall protections and handrails, joins the Gerflor Group.
New Creation & Artline: 92 references in Wood, Mineral and Design.
- 2009 **New Taralay Impression, Interior Concept 1.0, Saga²**.
- 2010 **Creation Clic System**.
Tarasafe (Crystal particles).
GTI Uni, Decor, Max (New emboss).
- 2011 **Insight**: new 0.55 mm Luxury Vinyl Tile
Mipolam Symbioz: T Group homogeneous flooring with 100% bio based plasticizer.
Evercare™: micro structured, cross coat polymerised, laser technology.



Housing







Sport & Leisure

COMMITTED TO SUSTAINABLE DEVELOPMENT

ECO-RESPONSIBLE SOLUTION



 Health & safety	Selected and responsible raw materials	NO heavy metal, NO solvent. NO formaldehyde, NO substance potentially subject to REACH* restrictions.
	Low VOC emissions	<ul style="list-style-type: none"> - Comply with AgBB protocol - Floorscore certified - Volatile Organic Compound (VOC) emissions of <250 µg/m³ after 28 days, using European procedures - No formaldehyde and carcinogenic emissions
	Fully hygienic solutions	The Sanosol [®] treatment prevents mould and bacterial (bacteriostatic) growth.
 Recycling	100% recyclable materials	Gerflor will help recycle its products at the end of their life cycle
	Uses recycled materials	<ul style="list-style-type: none"> - On average, Gerflor floors are made of 25% recycled content - 100% of recycled materials are inspected and exempt from REACH* restrictions.
 ISO 14001	ISO 14001 certified	Gerflor industrial sites hold ISO 14001 accreditation.
 Life-cycle analysis	Long life at low cost	Opting for high quality «no polish for life» flooring such as one of our patented Protecsol [®] , Spaclean [®] , Evercare [™] treated products, you can drastically reduce the usage of chemical product and water and ensure the best financial outcome but also the security of knowing the designs and colours will stand the test of time even in high traffic areas.

*REACH is the new European regulation on registering, assessing and authorising chemical products within the European Union.

Please do not hesitate to ask us for a full assessment of your project.

CONTRIBUTION TO LEED™ CERTIFICATION

LEED™ Certification (Leadership in Energy and Environmental Design) is an internationally recognized green building certification system. It provides third-party verification that a building or community was designed and built using strategies aimed at improving performance across all the metrics that matter most: energy savings, water efficiency, CO₂ emissions reduction, improved indoor environmental quality, and stewardship of resources and sensitivity to their impacts.

Gerflor contribution

- Low emitting materials:
Florescore certified products
- Products containing pre-consumer recycled materials
- 2 LEED™ specialists part of Gerflor staff



Reference:



KAUST University - Kingdom of Saudi Arabia
Photo credits: Oger international / KAUST University

Recycling








HOMOGENEOUS FLOORING




HOMOGENEOUS FLOORING

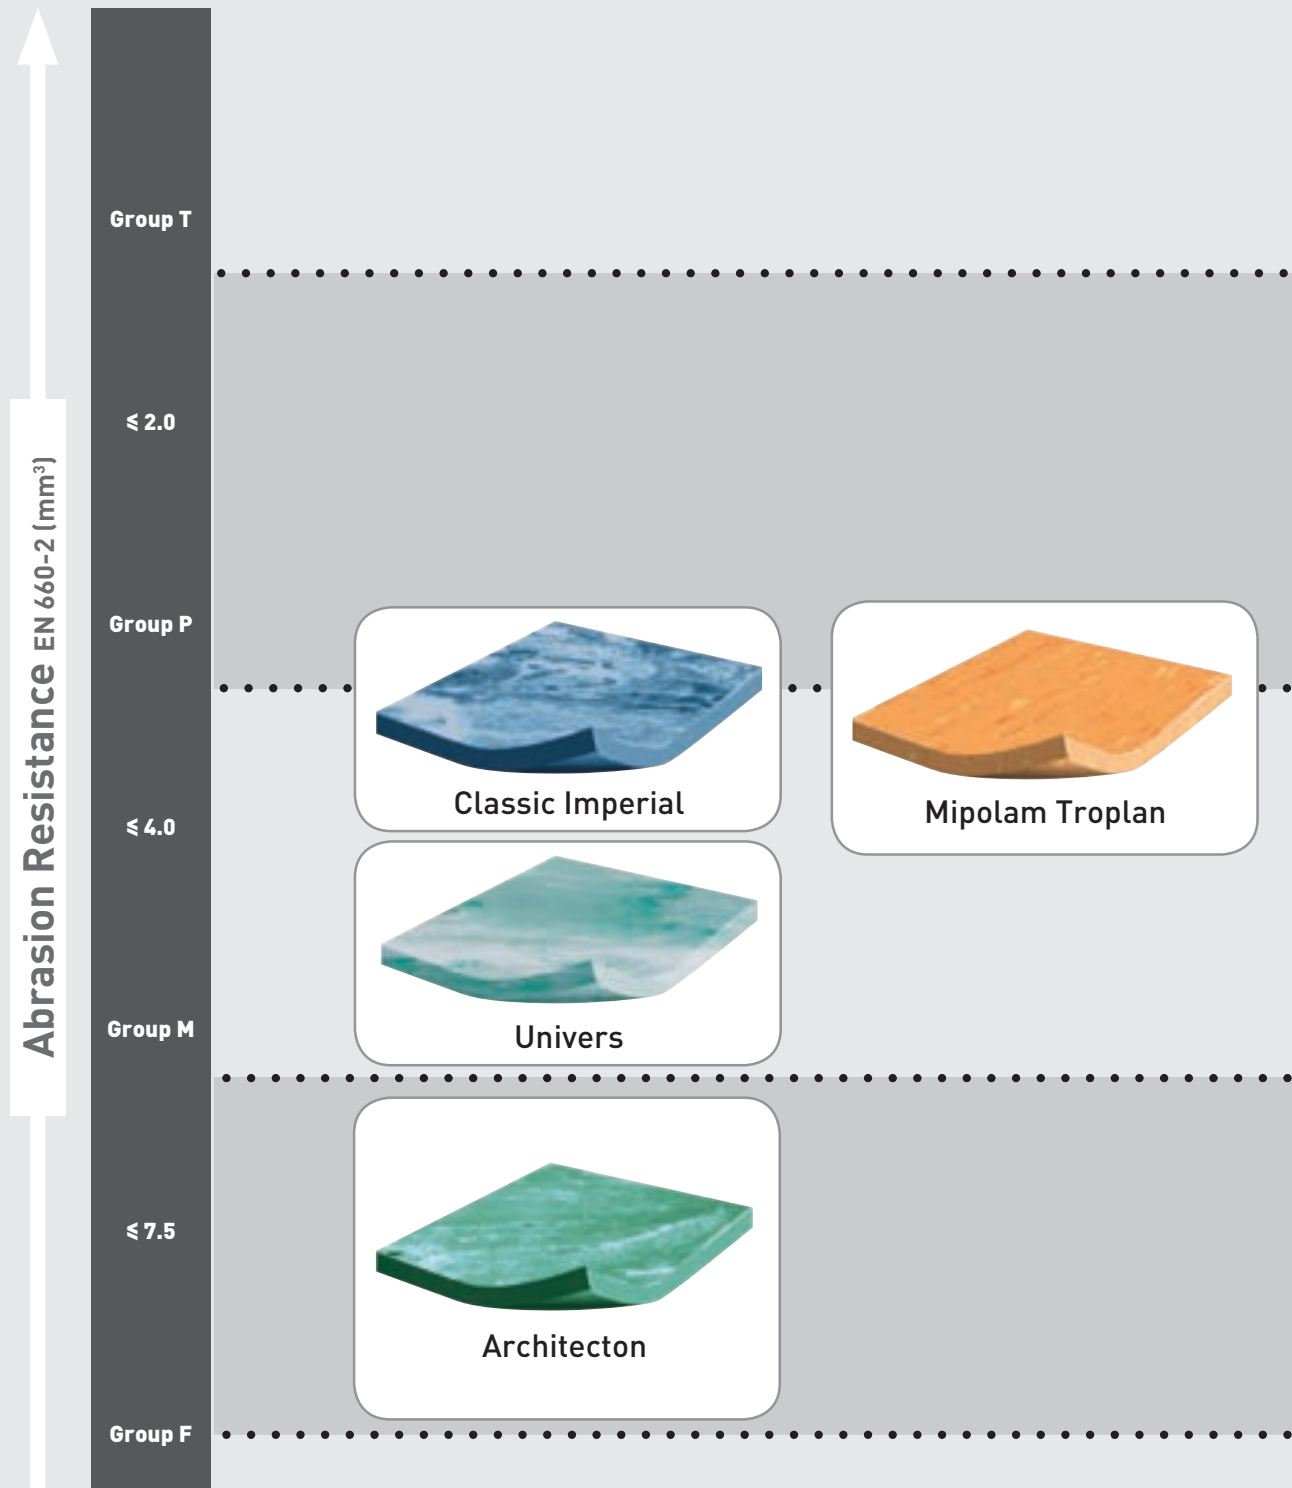



Mipolam Symbioz T

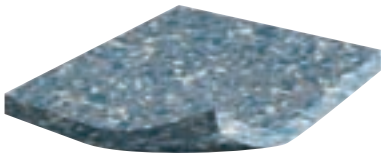

Mipolam Flair
Mipolam Elegance



Mipolam Esprit
Mipolam Accord
Mipolam Cosmo

HOMOGENEOUS FLOORING

12 - 39

Homogeneous flooring

Evercare™

New

- Mipolam Symbioz	18
- Mipolam Esprit	22
- Mipolam Accord	26
- Mipolam Cosmo	32

Homogeneous flooring (PUR Protect®)

- Mipolam Flair	24
- Mipolam Elegance	28

New

Homogeneous flooring (PUR+)

- Mipolam Troplan	33
-------------------	----

Homogeneous flooring (PUR)

- Classic Imperial	34
- Univers	38
- Architecton	39

HOMOGENEOUS FLOORING

MIPOLAM SYMBIOZ

▶ MIPOLAM SYMBIOZ



MIPOLAM SYMBIOZ is a fully flexible homogeneous compacted floorcovering in sheet, 2 m wide, abrasion group T, providing excellent resistance to wear and tear in high traffic areas. Its weight is 2580 gr/m².

It features a non directional design incorporating coloured chips to ensure an even colour throughout the thickness.

MIPOLAM SYMBIOZ contains over 75% sustainable or renewable raw materials. It includes a **100% bio based plasticizer**, made of residues from cereals (wheat, corn...)

This floorcovering has extremely low VOC emissions, more than 40 times lower than the European standards.

In addition, the floorcovering features Evercare™, new patented surface treatment, providing unrivalled level of maintenance and chemical resistance.

Evercare™ treatment is micro structured, cross coat polymerised, using laser technology and is acting as a barrier against stains and chemical aggression. It definitively replaces the application of wax or polish during the life time of the product.

As part of our sustainable development policy, this product is manufactured in the first floor covering plant awarded with the triple certification: ISO 9001 (quality), ISO 14 001 (environment) and OHSAS 18001 (safety).

MIPOLAM SYMBIOZ



T

Evercare™



Mipolam Symbioz has been engineered using a full life cycle model, to guarantee the lowest environmental impact at every stage of the product life.

- ▶ **Highest durability:** abrasion T group: product life expectancy > 20 years
- ▶ **Exclusive Bio based plasticizer**, 100% made from organic source.
- ▶ **Evercare™** : New revolutionary patented new surface treatment with unique performance in staining and chemical resistance.
- ▶ **Easy maintenance:** no wax for life
- ▶ **Highest stain resistance**
- ▶ **Eco-responsible bio based plasticizer**
- ▶ **On average 30% savings on maintenance cost**
- ▶ **15% less detergent and water use**

Indoor Air Quality: very low emitting material (40 times lower than European standards)

MIPOLAM SYMBIOZ

DESCRIPTION

Total thickness	EN 428	mm	2
Weight	EN 430	g/m ²	2580
Width of sheet	EN 426	cm	200
Length of sheet	EN 426	lm	20

CLASSIFICATION

Norm / Product specification	-	-	EN 649
European classification	EN 685	class	34-43
K rating	-	class	K5
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	class	R9
Slip resistance	NF EN 13893	-	≥ 0.30 (DS)

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	EN 649	group	T
Dimensional stability	EN 434	%	≤ 0.40
Residual indentation	EN 433	mm	≈ 0.03
Thermal conductivity	EN 12 524	W/(m.k)	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical product resistance	EN 423	class	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Fungistatic & bacteriostatic	DIN EN ISO 846-A/C	-	no growth
Surface treatment	Patented treatment	-	EVERCARE™

CE MARKING



EN 14041



HOMOGENEOUS FLOORING

MIPOLAM SYMBIOZ



6027 Acacia




6048 Lavander



6007 Garden



6006 Blue Sky



6055 Tomato



6017 Grass



6016 Sea Blue



6035 Sunset



6037 Lagoon



6046 Blue Night




6032 Sunshine

MIPOLAM SYMBIOZ


 Compact	T	Evercare™	 100% recyclable
---	---	-----------	---




6029 Cloud



6045 Chocolate




6034 Mole



6059 Black Diamond




6010 Mist




6043 Wood




6004 Sandstone




6044 Sea Storm




6009 Grey Stone




6041 Clay




6003 Linen




6039 Pebble



6008 Calico



6031 Breeze



6001 Cotton

HOMOGENEOUS FLOORING

MIPOLAM ESPRIT / FLAIR / ACCORD / ELEGANCE


▶ MIPOLAM ESPRIT



MIPOLAM ESPRIT is a flexible, homogenous, calendered, compacted floorcovering available in tiles and sheets. The product is antistatic and has a non directional multi-tonal design incorporating coloured chips which are dyed prior to being added to the raw mixture to ensure an even colour throughout the thickness of the product. Uniquely treated with Evercare™, new patented surface treatment, providing unrivalled level of maintenance and chemical resistance. Evercare™ treatment is micro structured, cross coat polymerised, using laser technology and is acting as a barrier against stains and chemical aggression. It definitively replaces the application of wax or polish during the life time of the product. MIPOLAM ESPRIT is fungistatic and bacteriostatic.

Hard wearing, the flooring complies with EN 649 (34-43) and has a group P (K5) wear rating. It is suitable for heavy duty traffic areas.

▶ MIPOLAM FLAIR

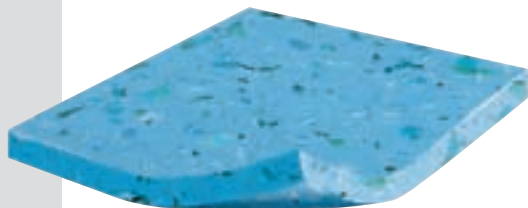


MIPOLAM FLAIR is a flexible homogeneous calendered compacted floorcovering in sheets, antistatic, with non directional polychrome design including transparent coloured chips, colour dyed as a raw mixture to ensure even colour throughout the thickness.

Uniquely treated with PUR Protect®, the product has excellent cleaning characteristics and does not require the application of acrylic polishes.

MIPOLAM FLAIR is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34 - 43) and has a group P (K5) wear rating. It is suitable for heavy traffic areas.

▶ MIPOLAM ACCORD

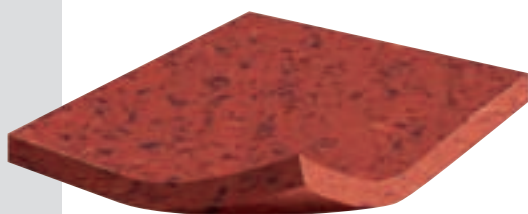

MIPOLAM ACCORD is a flexible homogeneous calendered compacted floorcovering in tiles or sheets, antistatic, with semi directional polychrome design, colour dyed as a raw mixture to ensure even colour throughout the thickness. Uniquely treated with Evercare™, new patented surface treatment, providing unrivalled level of maintenance and chemical resistance. Evercare™ treatment is micro structured, cross coat polymerised, using laser technology and is acting as a barrier against stains and chemical aggression. It definitively replaces the application of wax or polish during the life time of the product. MIPOLAM ACCORD is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34 - 43) and has a group P (K5) wear rating. It is suitable for heavy traffic areas.

▶ MIPOLAM ELEGANCE



MIPOLAM ELEGANCE is a flexible homogeneous calendered compacted floorcovering in tile or sheet, antistatic, with non directional polychrome design, colour dyed as a raw mixture to ensure even colour throughout the thickness.

Uniquely treated with PUR Protect®, the product has excellent cleaning characteristics and does not require the application of acrylic polishes.

MIPOLAM ELEGANCE is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34-43) and has a group P (K5) wear rating. It is suitable for heavy duty traffic areas.

MIPOLAM ESPRIT / FLAIR / ACCORD / ELEGANCE

**High performing homogeneous multipurpose flooring.**

Suitable for heavy traffic areas (education, healthcare, shops)

- ▶ Polyurethane surface treatment (PUR Protect®) : excellent cleaning characteristics.
- ▶ Evercare™ : New revolutionary patented new surface treatment with unique performance in staining and chemical resistance
- ▶ Antistatic
- ▶ Densely compacted surface for improved wear and ease of maintenance
- ▶ Fungistatic and bacteriostatic

			MIPOLAM ESPRIT	MIPOLAM FLAIR	MIPOLAM ACCORD	MIPOLAM ELEGANCE
DESCRIPTION						
Total thickness	EN 428	mm	2	2	2	2
Weight	EN 430	g/m ²	2900	2950	3000	3040
Width of sheet	EN 426	cm	200	200	200	200
Length of sheet	EN 426	lm	20	20	20	20
Tile size	EN 427	mm	608 x 608	-	608 x 608	608 x 608
Number of tiles per package	-	-	20	-	20	20
CLASSIFICATION						
Norm / Product specification	-	-	EN 649	EN 649	EN 649	EN 649
European classification	EN 685	class	34-43	34-43	34-43	34-43
K rating	-	class	K5	K5	K5	K5
Fire rating	EN 13501-1	class	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2
PERFORMANCES						
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 4.0	≤ 4.0	≤ 4.0
Wear group	EN 649	group	P	P	P	P
Dimensional stability	EN 434	%	Sheet ≤ 0.40 Tile ≤ 0.25	≤ 0.40	Sheet ≤ 0.40 Tile ≤ 0.25	Sheet ≤ 0.40 Tile ≤ 0.25
Residual indentation	EN 433	mm	≈ 0.03	≈ 0.03	≈ 0.03	≈ 0.03
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical product resistance	EN 423	class	OK	OK	OK	OK
Fungistatic & bacteriostatic treatment	-	-	OK	OK	OK	OK
Surface treatment	-	-	Evercare™	PUR Protect®	Evercare™	PUR Protect®

CE MARKING


CE	EN 14041	

HOMOGENEOUS FLOORING


MIPOLAM ESPRIT




5032 Sunny




5035 Red Rocks



5055 Indian Red



5060 Graphite




5041 Storm Cloud

MIPOLAM ESPRIT


 Compact	 Compact	P	Evercare™	 100% recyclable
---	---	----------	------------------	---



5007 Chartreuse



5006 Sky Blue



5031 Zephyr



5002 Vanilla



5017 Yellow Green




5016 Baltic Blue




5034 Moka



5004 Camel



5027 Evergreen




5026 Royal Blue




5033 Taupe



5015 Cafe Creme



5037 Forest Green




5056 Midnight Blue



5053 Moon Rock



5045 Irish Coffee



5010 Silver Grey



5009 Platinum



5001 Ice Crystal


HOMOGENEOUS FLOORING

MIPOLAM FLAIR




MIPOLAM FLAIR


 Compact	P	 PUR/Protect®	 100% recyclable
---	----------	--	---




0001 Legato




0003 Sordino




0005 Dolce




0004 Moderato




0006 Piano




0002 Brio



0008 Lento




0011 Cantabile




0007 Andante




0013 Giocosio




0010 Mesto



0012 Animato




0009 Grazioso



0014 Vivace

HOMOGENEOUS FLOORING

MIPOLAM ACCORD

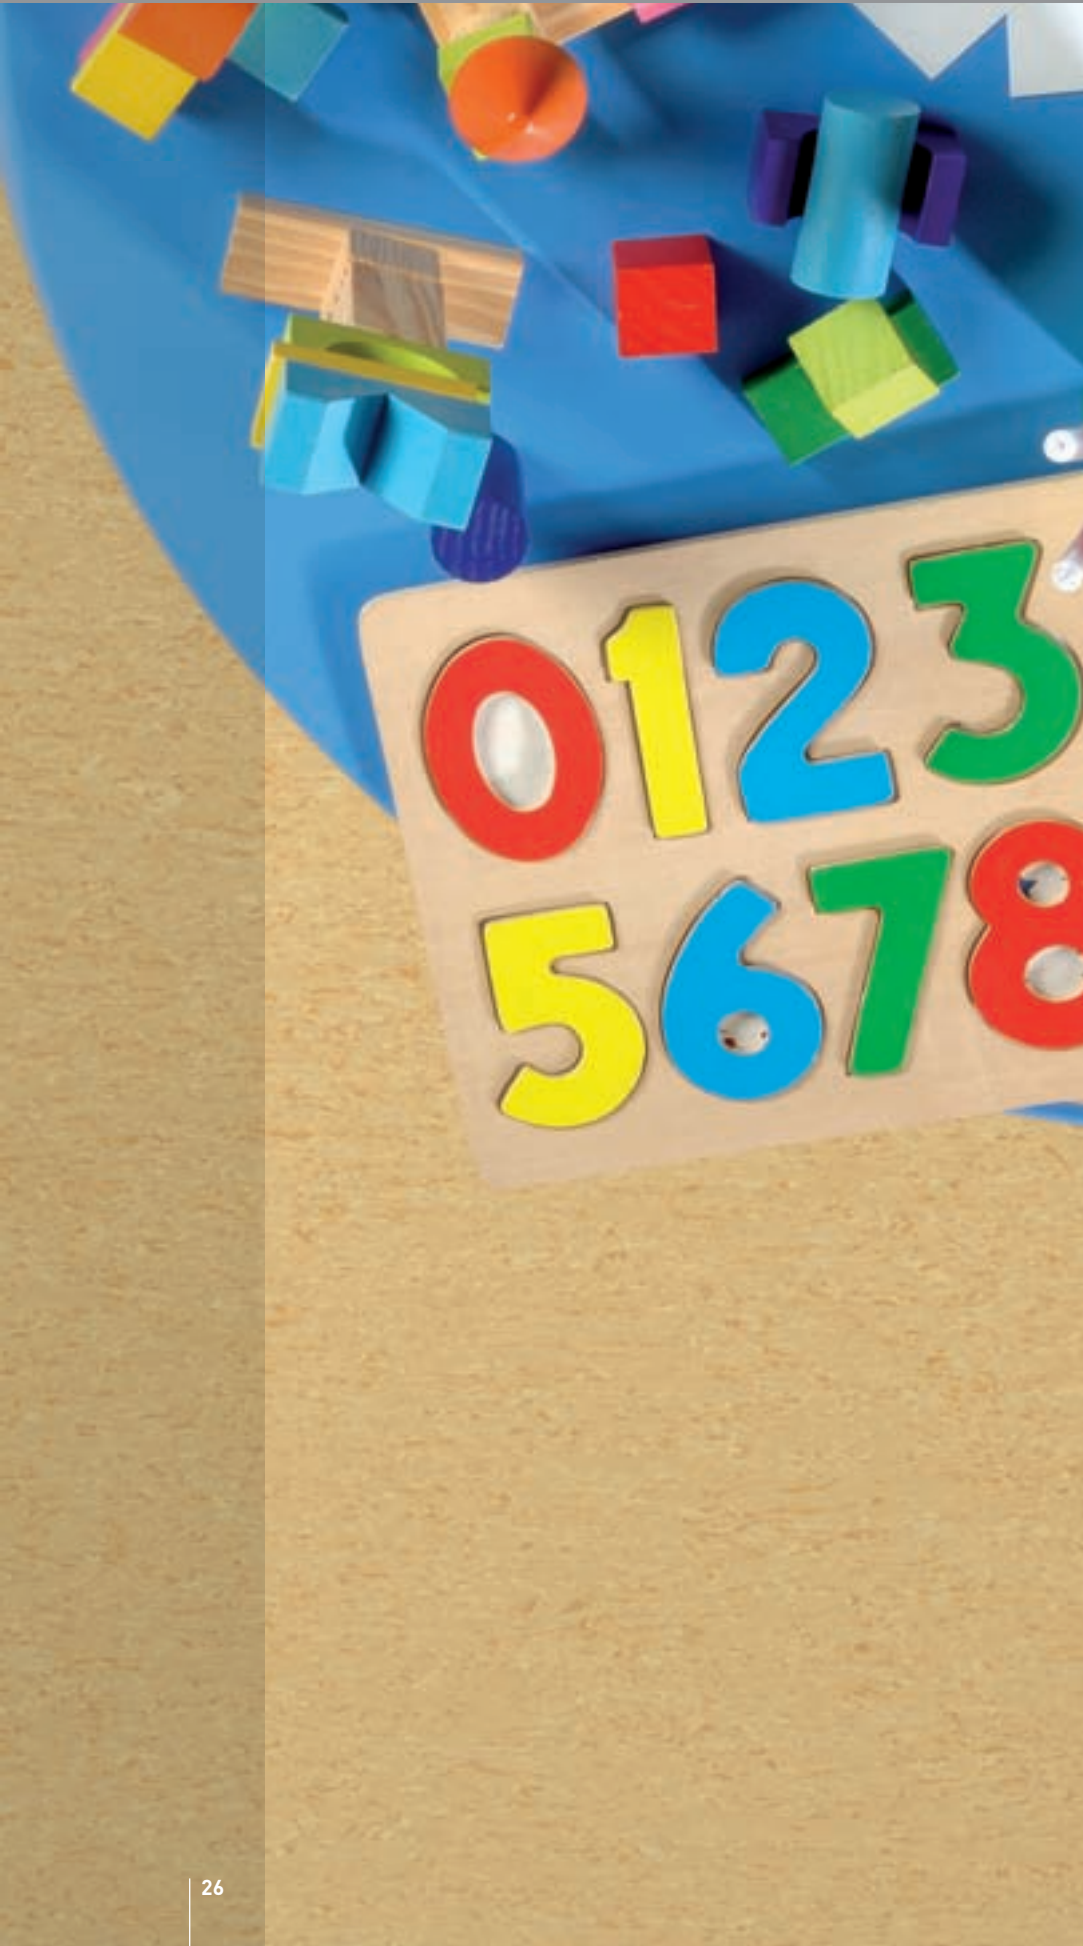

0320 Ontario




0304 Lugano

MIPOLAM ACCORD

 Compact	 Compact	P	Evercare™	 100% recyclable
---	---	----------	------------------	---



0360 Balaton



0359 Michigan



0310 Huron



0309 Erie



0337 Baikal



0317 Ladoga




0307 Onega



0301 Louise



0355 Kariba




0335 Malawi



0325 Victoria



0332 Dore



0345 Leman



0334 Como



0314 Maggiore



0303 Manitoba



0358 Tana



0346 Roxen




0316 Mälaren




0306 Inari

HOMOGENEOUS FLOORING


MIPOLAM ELEGANCE



0323 Nut



0347 Mangoustan




0705 Patisson



0697 Greenstone




0322 Jicama




0318 Grape




0704 Raspberry Grey




0328 Almond



0696 Ginger

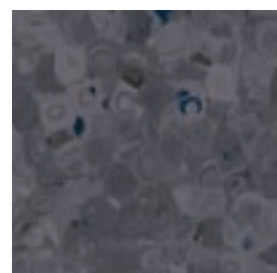


0344 Nutmeg



0327 Pear



0343 Pecan




0321 Olive


MIPOLAM ELEGANCE

New

 Compact	 Compact	P	 PURProtect®	 100% recyclable
---	---	----------	---	---




0703 Lime



0699 Banana




0340 Jambolan




0319 Quetsche




0329 Hazelnut



0333 Ananas




0339 Apple



0348 Bluetta




0324 Chestnut




0700 Melon



0338 Kiwi




0341 Bilberry



0698 Cacao




0702 Kumquat




0330 Litchi




0342 Blueberry




0326 Jojoba



0331 Plum



0336 Acerola



0349 Bluecrop

HOMOGENEOUS FLOORING

MIPOLAM COSMO / TROPLAN 100 / CLASSIC IMPERIAL

▶ MIPOLAM COSMO



MIPOLAM COSMO is a flexible compacted homogeneous calendered floorcovering in tiles or sheets, antistatic, with non-directional polychrome design, colour dyed as a raw mixture to ensure even colour throughout the thickness.

Uniquely treated with Evercare™, new patented surface treatment, providing unrivalled level of maintenance and chemical resistance. Evercare™ treatment is micro structured, cross coat polymerised, using laser technology and is acting as a barrier against stains and chemical aggression. It definitively replaces the application of wax or polish during the life time of the product.

MIPOLAM COSMO is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34 - 43) and has a group P (K5) wear rating. It is suitable for heavy traffic areas.

▶ MIPOLAM TROPLAN



MIPOLAM TROPLAN is a flexible homogeneous calendered compacted floorcovering in tiles or sheets, with directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance.

It receives a polyurethane (PUR+) surface treatment for ease of maintenance and to avoid the use of an acrylic emulsion after installation.

MIPOLAM TROPLAN is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34 - 43) and has a group M (K5) wear rating. It is suitable for heavy traffic areas.

▶ CLASSIC IMPERIAL



CLASSIC IMPERIAL is a flexible homogeneous calendered compacted floorcovering in tiles or sheets, with directional design, colour dyed as a raw mixture to ensure even colour throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance.

It receives a polyurethane (PUR) surface treatment for ease of maintenance and to avoid the use of an acrylic emulsion after installation.

CLASSIC IMPERIAL is fungistatic and bacteriostatic.

The flooring complies with the EN 649 (34 - 43) and has a group M (K5) wear rating. It is suitable for heavy traffic areas.

MIPOLAM COSMO / TROPLAN 100 / CLASSIC IMPERIAL






 Compact	 Compact	PUR (Classic)	PUR+ (Troplan)	Evercare™ (Cosmo)	 100% recyclable
---	---	----------------------	-----------------------	--------------------------	---

- ▶ Homogeneous multipurpose flooring suitable for normal to heavy traffic areas.
- ▶ Densely compacted surface for improved wear and ease of maintenance.
- ▶ Polyurethane PUR+ / PUR (surface treatment: ease of maintenance).
- ▶ Evercare™ : New revolutionary patented new surface treatment with unique performance in staining and chemical resistance
- ▶ Fungistatic and bacteriostatic.

			MIPOLAM COSMO	MIPOLAM TROPLAN	CLASSIC IMPERIAL	
DESCRIPTION						
Total thickness	EN 428	mm	2	2	1.5	2
Weight	EN 430	g/m ²	3120	3300	2520	3460
Width of sheet	EN 426	cm	200	200	200	200
Length of sheet	EN 426	lm	20	20	20	20
Tile size	EN 427	mm	608 x 608	608 x 608	-	300 x 300 608 x 608
Number of tiles per package	-	-	20	20	-	50 / 20


CLASSIFICATION						
Norm / Product specification	-	-	EN 649	EN 649	EN 649	EN 649
European classification	EN 685	class	34-43	34-43	23-31	34-43
K rating	-	class	K5	K5	K3	K5
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2	< 2

PERFORMANCES						
Wear resistance	EN 660.2	mm ³	≤ 4.0	≤ 7.5	≤ 15	≤ 7.5
Wear group	EN 649	group	P	M	F	M
Dimensional stability	EN 434	%	Sheet ≤ 0.4 Tile ≤ 0.25	Sheet ≤ 0.4 Tile ≤ 0.25	Sheet ≤ 0.4	Sheet ≤ 0.4 Tile ≤ 0.25
Residual indentation	EN 433	mm	0.03	≈ 0.03	≈ 0.03	≈ 0.03
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6	≥ 6
Chemical product resistance	EN 423	class	OK	OK	OK	OK
Fungistatic & bacteriostatic treatment	-	-	OK	OK	OK	OK
Surface treatment	-	-	Evercare™	PUR+	PUR	PUR


CE MARKING						
	EN 14041	  				
						

HOMOGENEOUS FLOORING


MIPOLAM COSMO



2609 Light Smoke




2610 Silver




2659 Warm Grey




2325 Ocre




2633 Lichen



2606 Azur




2636 Overseas



2317 Soft Green



2603 Lemon Chiffon



2607 Aqua Marine*



2637 Emerald



2337 Green Forest




2604 Wheat



2635 Peach Orange*



2655 Tangerine



2355 Real Red

 Compact	 Compact	P	PUR+	 100% recyclable
---	---	----------	-------------	---




1032 Yellow



1055 Abricot



1010 Grey



1009 Light Grey



1002 Beige



1003 Light Ocre



1059 Blue Grey




1006 Blue



1007 Green



1035 Ocre



1040 Dark Grey



1036 Medium Blue




1037 Medium Green




1004 Earth




1060 Anthracite



1056 Dark Blue



1057 Dark Green



1033 Brown

HOMOGENEOUS FLOORING

MIPOLAM CLASSIC IMPERIAL



MIPOLAM CLASSIC IMPERIAL

 Compact	 Compact	M	PUR	 100% recyclable
---	---	----------	------------	---

2 mm - 2 m x 20 lm - Group M

▲ 1.5 mm - 2 m x 20 lm - Group F



0002 Platinum ▲



0005 Steel ▲



0013 Pewter



0102 Black



0103 White




0112 Storm



0010 Azure ▲



0019 Blue



0016 Sand




0012 Mint



0015 Leaves



0020 Forest




0003 Ivory ▲



0014 Brown



0109 Sun



0007 Crocus



0006 Honey



0004 Clay



0018 Terra



0017 Red

HOMOGENEOUS FLOORING

UNIVERS - ARCHITECTON

▶ UNIVERS




UNIVERS is a homogeneous calendared vinyl floorcovering in tiles or sheets with colouration throughout the thickness of the material.

The flooring complies with the EN 649 (34-43) and has a group M (K5) wear rating. It is suitable for normal to heavy traffic areas.

UNIVERS is fungistatic and bacteriostatic.

It receives a protective PUR factory seal: a good foundation for routine maintenance. Acrylic emulsion / polishes required after installation.

▶ ARCHITECTON

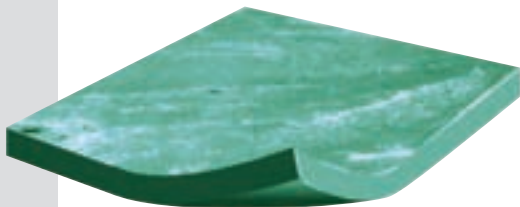

ARCHITECTON is an homogeneous calendared vinyl floorcovering available in tile form with colouration throughout the thickness of the material.

The flooring complies with the EN 649 (33-42) and has group F (K4) wear rating. It is suitable for normal to medium foot traffic.

ARCHITECTON is fungistatic and bacteriostatic.

It receives a protective PUR factory seal: a good foundation for routine maintenance. Acrylic emulsion / polishes required after installation.

 Tiles only

UNIVERS - ARCHITECTON



- ▶ **Univers and Architecton are homogeneous multipurpose floorings**
- ▶ **Univers is available in tile or sheet format and is suitable for normal to heavy traffic areas, K5 (Group M) wear rating.**
- ▶ **Architecton is available in tiles only and is suitable for normal to medium traffic areas, K4 (Group F) wear rating**
- ▶ **Protective factory seal (PUR)**
- ▶ **Fungistatic and bacteriostatic**

			UNIVERS	ARCHITECTON
DESCRIPTION				
Total thickness	EN 428	mm	2	2
Weight	EN 430	g/m ²	3360	3680
Width of sheet	EN 426	cm	200	-
Length of sheet	EN 426	lm	20	-
Tile size	EN 427	mm	608 x 608	300 x 300
Number of tiles per package	-	-	20	50
CLASSIFICATION				
Norm / Product specification	-	-	EN 649	EN 649
European classification	EN 685	class	34-43	33-42
K rating	-	class	K5	K4
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
PERFORMANCES				
Wear resistance	EN 660.2	mm ³	≤ 7.5	≤ 15
Wear group	EN 649	group	M	F
Dimensional stability	EN 434	%	Sheet ≤ 0.40 Tile ≤ 0.25	≤ 0.25
Residual indentation	EN 433	mm	≈ 0.03	≈ 0.03
Thermal conductivity	EN 12 524	W/(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Chemical product resistance	EN 423	class	OK	OK
Fungistatic & bacteriostatic treatment	-	-	OK	OK
Surface treatment	-	-	PUR	PUR
CE MARKING				
CE	EN 14041			

HOMOGENEOUS FLOORING

UNIVERS



0310 Light Green



0306 Green



0313 Earth



0106 Slate



0305 Blue




0107 Cream



0301 Beige



0304 Light Grey



0307 Brown



0311 Yellow



0108 Pepper



0105 Cherry




0312 Orange



0303 Grey

ARCHITECTON

 Compact	F	PUR	 100% recyclable
---	----------	------------	---



0092 White



0027 Straw



0055 Summer




0045 Apple




0035 Glacier



0069 Fawn



0043 Muffin




0028 Alp



0085 Marina



0048 Walnut




0065 Clementine




0075 Pigeon



0088 Shadow




0078 Claret




0068 Strawberry




0013 Ash



0098 Storm



0810 Brown



0902 Black